


13-Spindle "Standard" Line Boring Machine

CONQUEST
INDUSTRIES 


MADE IN

THE U.S.A.

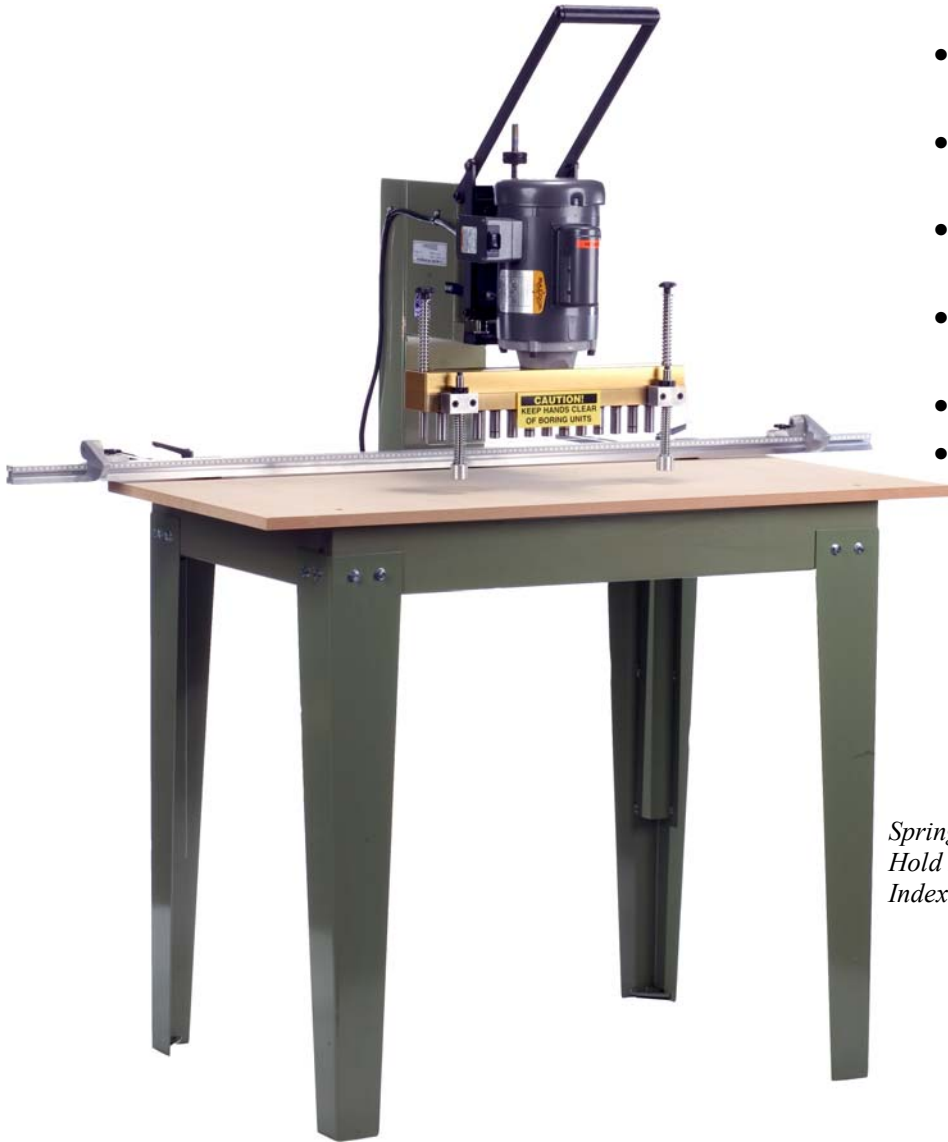

- 64" Fence Capacity with 2 Flip Stops.
- Down Stroke Operation for Easy Viewing.
- 12" Throat Opening (capacity to drill from edge of board).
- 3,450 rpm TEFC BALDOR Motor.
- *Optional* Pneumatic Operation.
- *Optional* Additional Fence Capacity & Flip stops.

*Spring Loaded
Hold Downs &
Index Pins*

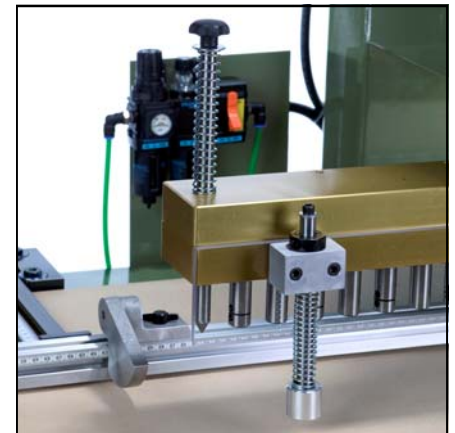

STANDARD FEATURES & SPECIFICATIONS

- 2 flip stops.
- 64" fence capacity.
- 2 Spring loaded index pins.
- 2 Spring loaded hold downs.
- 32 millimeter centers, distance between first and last drill = 15".
- 13-spindle boring head with heat treated steel helical gears.

One Year Warranty On Workmanship & Manufacturing

- Baldor motor, 3,450 rpm, 2hp – 115/230 volt (11.8 / 5.9 amps) 60 Hz Single Phase.
- *Optional* Pneumatic Operation, (turns off when pedal released, adjustable drilling speed).
- Accepts 10 millimeter flat shank bits, 12 Lefts & 11 Rights.
- *Machine weight (approx.) 330 lbs, crated 380 lbs. Pneumatic 400lbs.*

Distributed By:

THAYER

**W W Thayer Company
1444 Hoelzer Court
Pacific, MO 63069**

**(800) 323-7430 Ph
(636) 257-8101 Fx
www.wwthayer.com**