

Pneumatic 23-Spindle Line Boring Machine

CONQUEST
INDUSTRIES 


MADE IN

THE U.S.A.



- Pneumatic Operation for Fast Cycle Times.
- 64" Fence Capacity with 2 Flip Stops.
- Down Stroke Operation for Easy Viewing.
- 12" Throat Opening (capacity to drill from edge of board).
- 3,450 rpm TEFC BALDOR Motor.
- *Optional* Additional Fence Capacity & Flip Stops.

*Spring Loaded
Hold Downs,
Index Pins,
Flip-Stops &
Precision Fence
Alignment.*

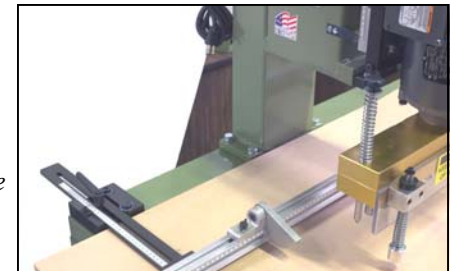

STANDARD FEATURES & SPECIFICATIONS

- 2 flip stops.
- 64" fence capacity.
- 2 Spring loaded index pins.
- 2 Spring loaded hold downs.
- Pneumatic foot pedal operation.
- Motor turns off when pedal released.
- 32 millimeter centers, distance between first and last drill = 27.7".

One Year Warranty On Workmanship & Manufacturing

- 23-spindle boring head with heat treated steel helical gears.
- Baldor motor, 3,450 rpm, 2hp – 220 volt (11.5 amps) 60 Hz Single Phase.
- Accepts 10 millimeter flat shank bits, 12 Lefts & 11 Rights.
- *Machine weight (approx.) 420 lbs, crated 470 lbs.*

Distributed By:

THAYER

**W W Thayer Company
1444 Hoelzer Court
Pacific, MO 63069**

**(800) 323-7430 Ph
(636) 257-8101 Fx
www.wwthayer.com**