


"Mini" 13-Spindle Line Boring Machine

"A True Industrial Duty Machine Built for the Serious Cabinet Builder"



With Optional Stand

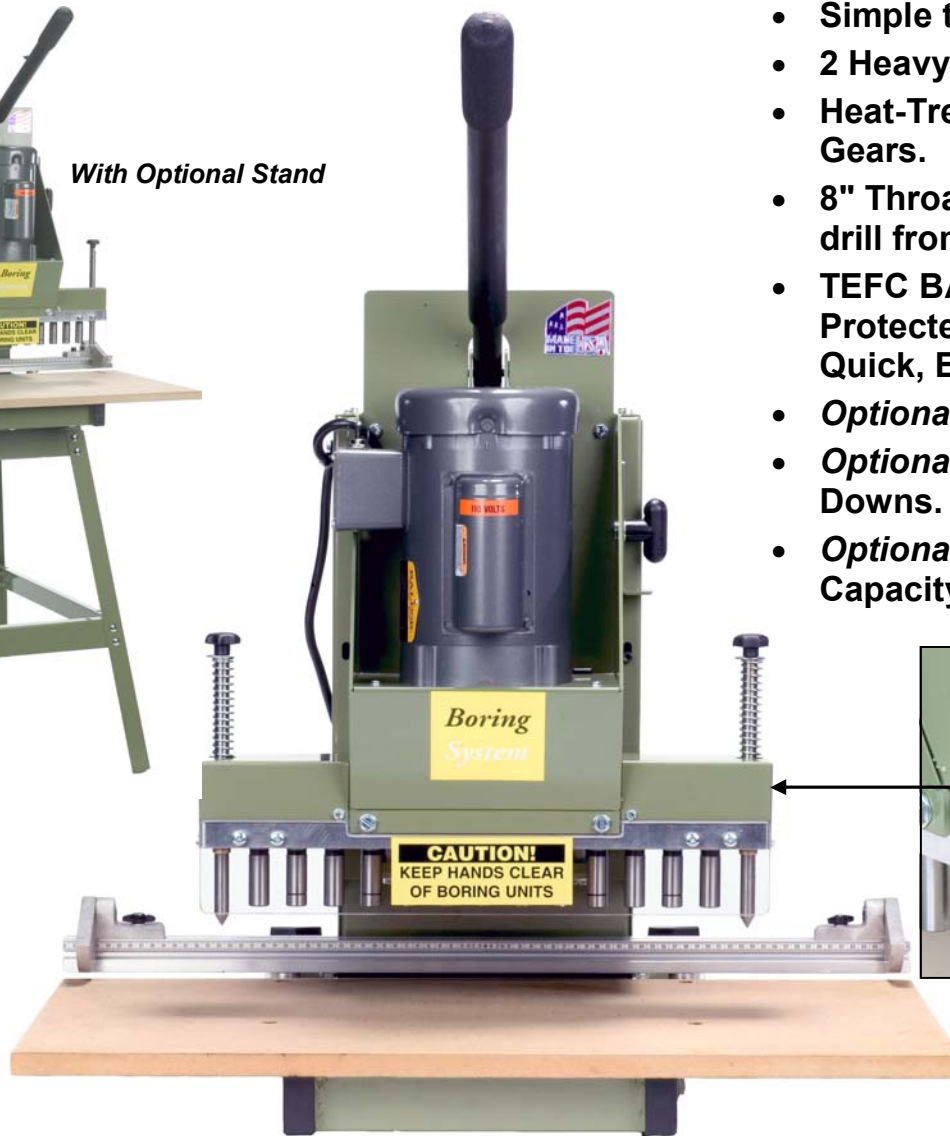

- Simple to Operate.
- 2 Heavy Duty Cast Flip Stops.
- Heat-Treated STEEL Helical Gears.
- 8" Throat Opening (capacity to drill from edge of board).
- TEFC BALDOR Motor, Dust Protected and 3,450 rpm for Quick, Easy & "Clean" Drilling.
- *Optional Stand.*
- *Optional Spring Loaded Hold Downs.*
- *Optional Additional Fence Capacity and Flip stops.*



Steel Heat Treated Helical Gears

STANDARD FEATURES & SPECIFICATIONS

- 2 flip stops.
- 30" fence capacity.
- 2 Spring loaded index pins.
- 13-spindle boring head with heat treated steel helical gears.
- 32 millimeter centers, distance between first and last drill = 15".

One Year Warranty On Workmanship & Manufacturing

- TEFC Baldor motor, 3,450 rpm, 1.5hp – 115 volt (9.6 amps) 60 Hz Single Phase.
- Accepts 10 millimeter flat shank bits, 6 Lefts & 7 Rights.
- *Machine weight (approx.) 132 lbs, crated 170 lbs.*

Distributed By: www.wwthayer.com **1444 Hoelzer Court, Pacific, MO 63069**



(800) 323-7430 Phone
(636) 257-8101 Fax

Manufactured By:

