



MAX

Industrial Line
Woodworking and Metalworking Machines

MAX



Tannewitz
QUALITY

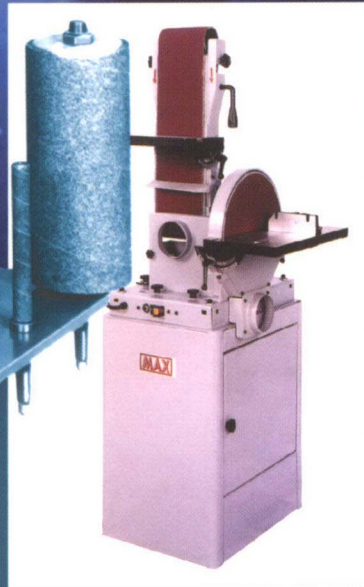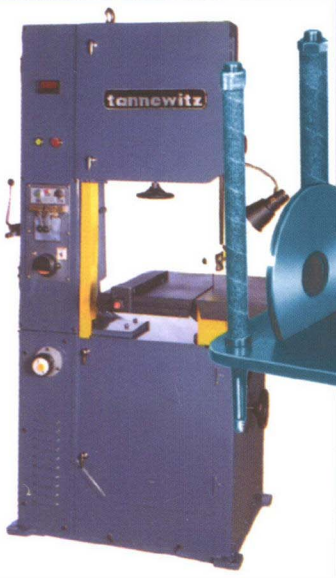

Over 150 years combined experience

A single source for industrial equipment

OPEN TYPE WIDE BELT SANDER

Ramco

FEATURES :


- * Limit switch safety stops are located on either side of the sanding belt to stop the sander if the sanding belt mistracks or breaks.
- * Conveniently located load meter provided for continuous monitoring of the main motor operation.
- * Side access door for quick sanding belt change.
- * Side extension bar provides firm support for wider material
- * Sanding belt tension and oscillation are pneumatically controlled.
- * Infeed and outfeed roller conveyor extensions are provided for better part support for longer pieces.




Standard Equipment:

- * Emergency rail stop.
- * Emergency stop button
- * Dust hood
- * 17" x 54" sanding belt

Combination Head:

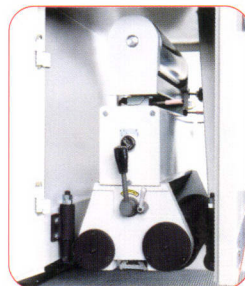

Pneumatic sanding belt Oscillating:

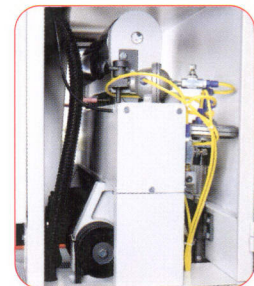

Specification:

MODEL:	DW-16P
Working width	16"
Working thickness	5"
Minimum board length	13-3/4"
Head configuration	Combination Head
Main motor	5HP 1PH
Feed motor	1/4HP 1PH
Sanding belt size	17" x 54"
Sanding belt speed	2200 SFPM
Compressed air requirements @ 5 atm (CFM)	4CFM
Exhaust Volume required (CFM)	800 CFM
Overall dimensions	38" X 38" X 72"
NW / GW	880 lbs / 990lbs

MAX Industrial Line

